


100-VOLT-20W-MONITOR-LOUDSPEAKER ML-200 / EN5424

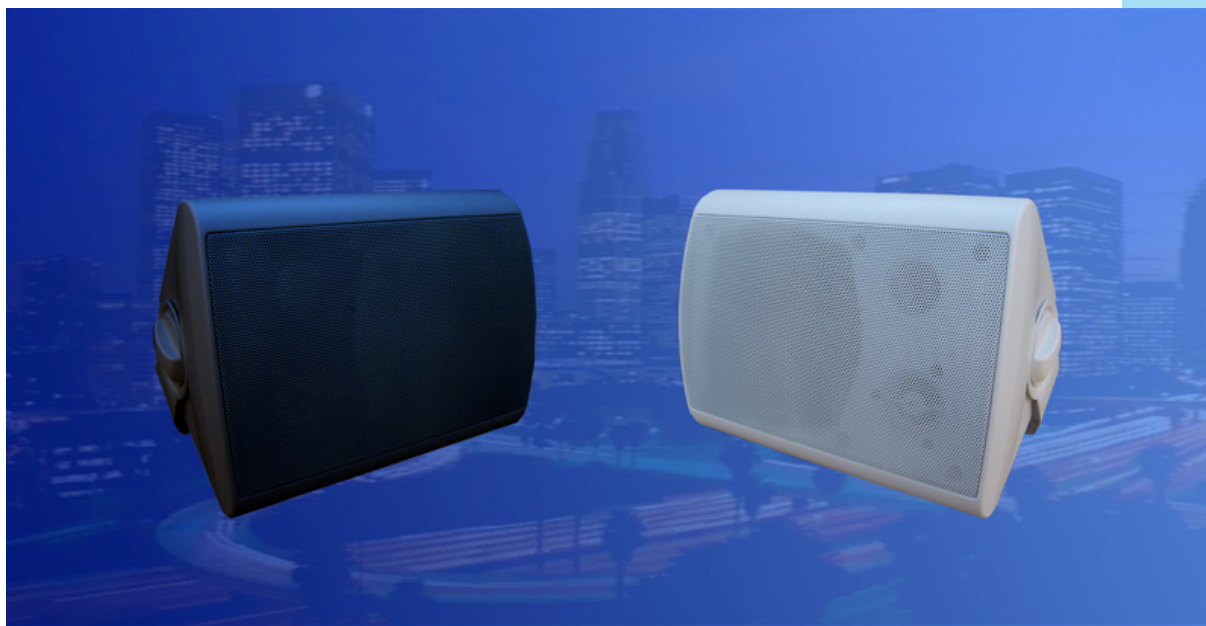

**ML
200**

**EN
5424**

**C
O
M
P
A
C
T**

**M
O
N
I
T
O
R**

20W

10W

5W

2,5W



- EASY/QUICK-MOUNTING THROUGH OMNI-MOUNT-BRACKET
- SPECIAL **DIN 912-ISO 4762** SCREWS
- LOW FLAMMABLE ABS-PLASTIC-MATERIAL ACC. TO EN 60695-11-20, CLASS 5VB
- **FOUR 100-V-TAPS** VIA CABLE & JUNCTION BOX
- OPTIONAL **CERAMIC-CLAMP** & **THERMO-FUSE** AVAILABLE
- QUICK-**IMPEDANCE-CHANGE** THROUGH **REAR-PANEL-ROTARY-SWITCH**
- STANDARD-COLOURS **BLACK & WHITE**
- **ML-200/EN-5424-CERTIFICATED-VERSION:
ORDER-NUMBER:**

ML-200/EN-5424
CPD-NR: 1293-CPD-0384

TECHNICAL DATA:

ML-200/EN5424 BLACK/WHITE


Loudspeaker:	2-Way-System
Power-Consumption:	100V-20-10-5-2,5W
Frequency-Range:	80-20 000 Hz
EN-Sensitivity 1W/4M:	72 dB
SPL 20W/4M:	85 dB
SPL 1W/1M max. EASE/Ulysses:	91 dB (6,5 kHz)
SPL 20W/1M max. EASE/Ulysses:	104 dB (6,5 kHz)
Radiation H (0,5/1/2/4kHz):	360°/335°/130°/81°
Radiation V (0,5/1/2/4kHz):	360°/317°/172°/88°
Dimensions:	220 x 160 x 140 (160) mm
Weight:	1,9 Kg
Material:	ABS-plastic-material
Colour:	black & white

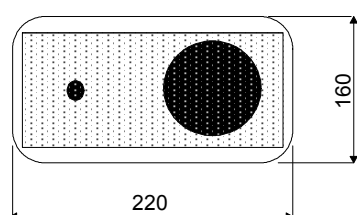






RADIATION DATA 100-VOLT-20W-MONITOR-LS ML-200 / EN5424

Testing Method	Axis	500Hz	1000Hz	2000Hz	4000Hz
EN5424	HOR	360°	335°	130°	81°
EN5424	VER	360°	317°	172°	88°
EASE/ULYSSES	HOR	360°	160°	125°	75°
EASE/ULYSSES	VER	360°	160°	135°	85°

Source Data: D:\knauch\Elko-Schmid\ML200\500Hz\HOR\ML200500Hz.P02 Copyright by Four Audio GmbH & Co KG Licensed to AAC

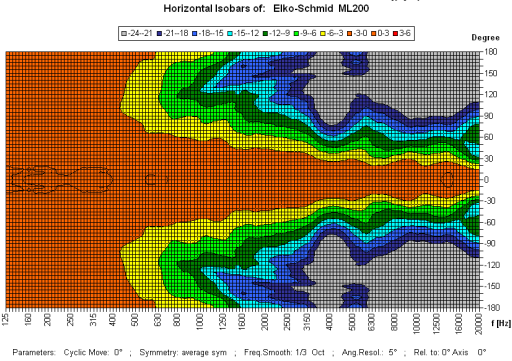

Source Data: D:\knauch\Elko-Schmid\ML200\500Hz\VER\ML200500Hz.P02 Copyright by Four Audio GmbH & Co KG Licensed to AAC

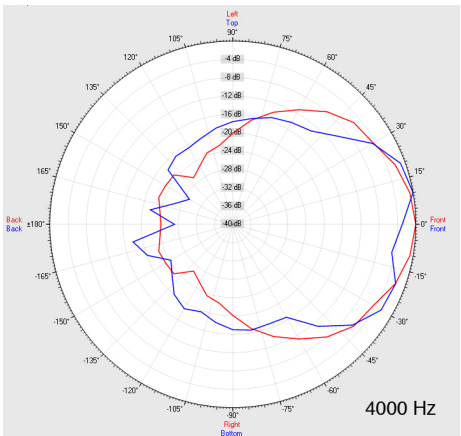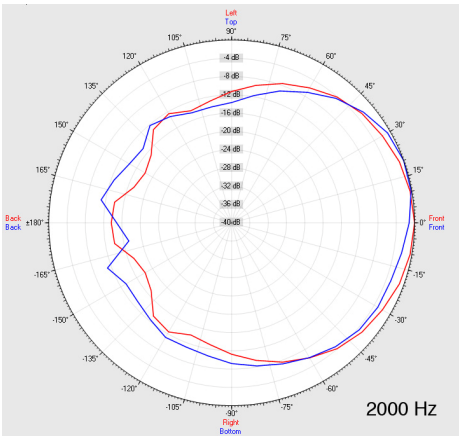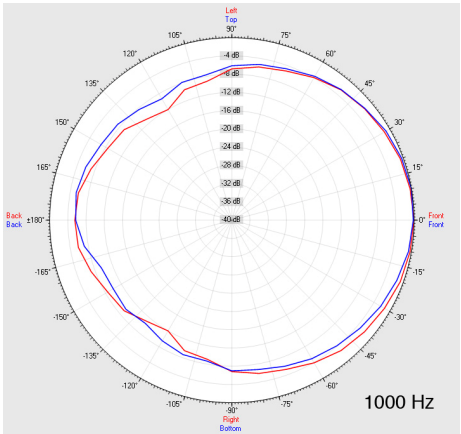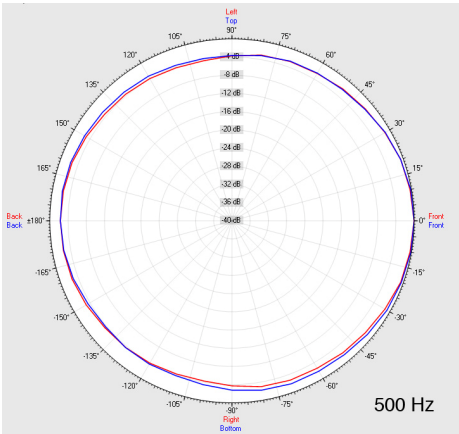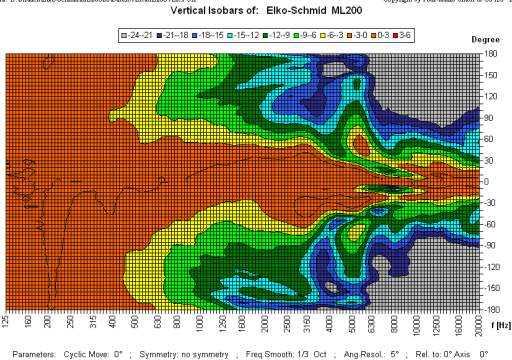

ML
200

EN
5424

C
O
M
P
A
C
T

M
O
N
I
T
O
R

20W

10W

5W

2,5W