

6W-Wall / ON-CEILING-LOUDSPEAKER DESIGN-230 / EN5424



D
E
S
I
G
N

230

EN
5424

W
A
L
L

—

C
E
I
L
I
N
G

L
O
U
D
S
P
E
A
K
E
R

- NEW SOFTLY-BENDED **DESIGN-CABINET**
- VERY **FAST MOUNTING** THROUGH **QUICK-SNAP-FRONT-GRILL**
- ONLY 2 DRILLING-POINTS FOR THE WHOLE LOUDSPEAKER
- HIGHLY **STABLE** ABS-CABINET V2 / HB75 OF VERY LOW **FLAMMABILITY**
- **50-HZ-STABLE** TRANSFORMER
- **TOUCH-PROTECTED** 100-V-CONNECTING-CLAMP
- WEATHER-PROTECTED & **WET-ROOM/DAMP-ROOM**-VERSIONS AVAILABLE
- OPTIONAL **CERAMIC**-CLAMP & **THERMO**-FUSE AVAILABLE


**DESIGN-EN-5424-CERTIFICATED VERSION:
ORDER-NUMBER:**

DESIGN-230/EN-5424
CPD-NR: 1293-CPD-0233

TECHNICAL DATA:

DESIGN-230/EN5424

Loudspeaker:	6W/120mm-broadband
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	80-15 000 Hz
EN-Sensitivity 1W/4M:	77,1 dB
SPL max 6W/4M:	87,0 dB
SPL 1W/1M max. EASE/Ulysses:	98,5 dB (1,3 kHz)
SPL 6W/1M max. EASE/Ulysses:	104,5 dB (1,3 kHz)
Radiation H (0,5/1/2/4kHz):	130°/105°/100°/70°
Radiation V (0,5/1/2/4kHz):	130°/115°/55°/65°
Dimensions:	230 x 170 x 80 mm
Weight:	1,2 Kg
Colour:	white

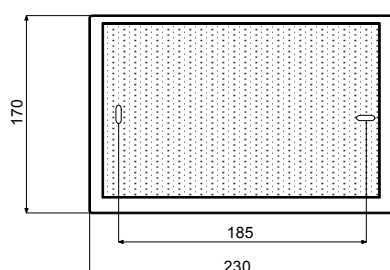


RADIATION DATA 6W-Wall / ON-CEILING-LS DESIGN-230 / EN5424

Testing Method	Axis	500Hz	1000Hz	2000Hz	4000Hz
EN5424	HOR	130°	105°	100°	70°
EN5424	VER	130°	115°	55°	65°
EASE/ULYSSES	HOR	180°	180°	180°	65°
EASE/ULYSSES	VER	180°	180°	110°	130°






Source Data: D:\trauch\Elko-Schmid\085230\daten\Dummy-808.P02 Copyright by Four Audio GmbH & Co KG Licensed to AAC

Horizontal Isobars of: Elko-Schmid Design-230

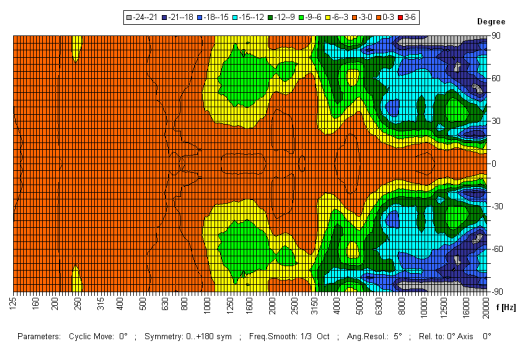

Source Data: D:\trauch\Elko-Schmid\085230\daten\Dummy-789.P02 Copyright by Four Audio GmbH & Co KG Licensed to AAC

Vertical Isobars of: Elko-Schmid Design-230

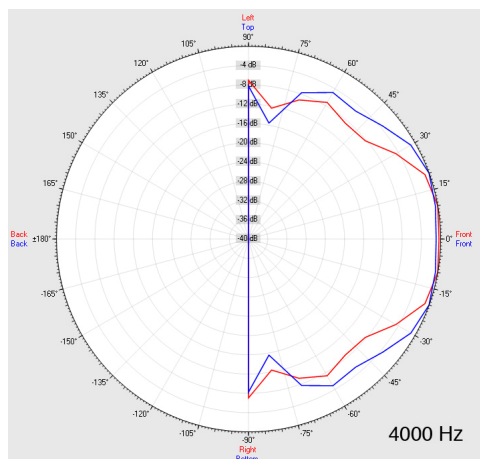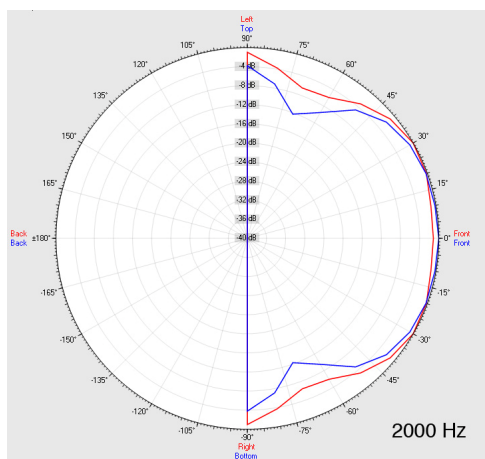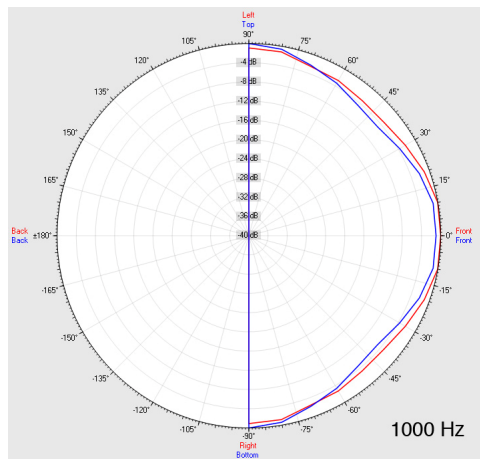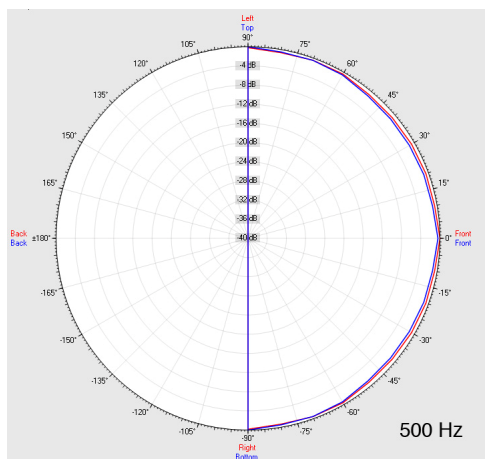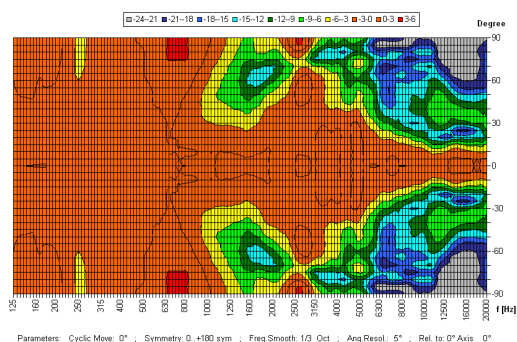

DESIGN

230

EN
5424

WALL

—

CEILING

LOUDSPEAKER