


W
U
L

270
DC

EN
5424

I
N

W
A
L
L

L
O
U
D
S
P
E
A
K
E
R


FOR

A/B

- SUITABLE FOR **HOLLOW-SPACE** & **IN-WALL-MOUNTING**
- **TWO AUTONOMOUS VOICE-COILS PER SYSTEM**
- TWO AUTONOMOUS **100-VOLT-TRANSFORMER** PER SYSTEM
- IN **CASE OF BREAKDOWN** OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **NO PHASE-SHIFT** ON THE MEMBRANE-SURFACE
- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE IN FAILURE-CASE**
- LOW INFLAMMABLE / SHOCK-PROOF ABS-ENCLOSURE
- **50-HZ-STABLE** TRANSFORMER / CUSTOM-COLOUR OBTAINABLE
- OPTIONAL **CERAMIC-CLAMP** & **THERMO-FUSE** AVAILABLE
- **EN-5424-CERTIFICATED VERSION OPTIONAL AVAILABLE:**
ORDER-NUMBER EN-VERSION:
WUL-270-DC/EN-5424
CPD-NR: 1293-CPD-0359

TECHNICAL DATA:
WUL-270-DC/EN5424

Loudspeaker:	5" / 2 x 15W with HF-Cone with HF-Dome
Power Consumption:	2 x 100V-6-3-1.5W
Frequency-Range:	80-16 000 Hz
EN-Sensitivity 1W/4M:	74 dB (single), 80 dB (double)
SPL max 6W/4M:	84,1 dB (single), 90,1 dB (double)
SPL 1W/1M max. EASE/Ulysses:	100 dB (1,4 KHz & 4,5 KHz)
SPL 6W/1M max. EASE/Ulysses:	106,5 dB (1,4 KHz & 4,5 KHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/167°/66°
Radiation V (0,5/1/2/4KHz):	180°/180°/160°/63°
Dimension:	270 x 181 x 79 mm
Weight:	1,6 Kg
Material:	ABS / Metalgrill
Colour:	white

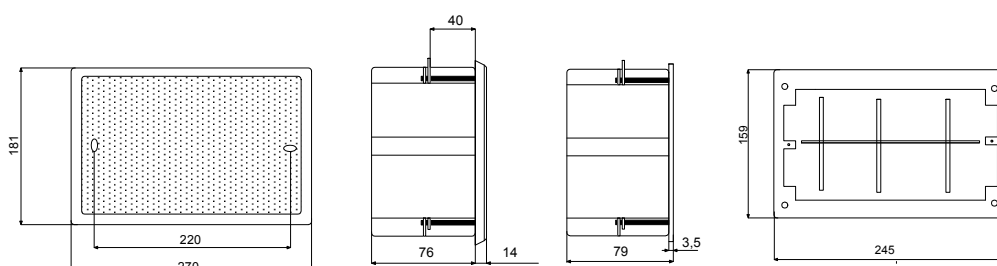


RADIATION DATA 6-W-IN-WALL-LS WUL-270-DC/EN5424 FOR AB-LINES

Testing Method	Axis	500Hz	1000Hz	2000Hz	4000Hz
EN5424	HOR	180°	180°	167°	66°
EN5424	VER	180°	180°	160°	63°
EASE/ULYSSES	HOR	180°	180°	70°	40°
EASE/ULYSSES	VER	180°	180°	70°	40°





Source Data: D:\Strauch\Elko-Schmid\WUL270DC\Daten\Dummy.POX

Copyright by Four-Audio GmbH & Co KG Licensed to AAC

Horizontal Isobars of: Elko-Schmid WUL-270DC

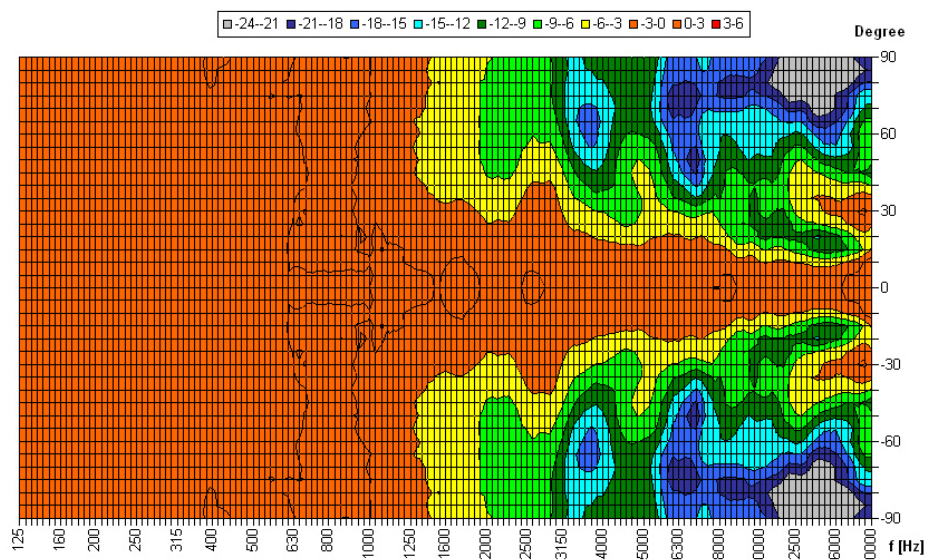

Parameters: Cyclic Move: 0° ; Symmetry: 0..+180 sym ; Freq.Smooth: 1/3 Oct ; Ang.Resol.: 5° ; Rel. to: 0° Axis 0°

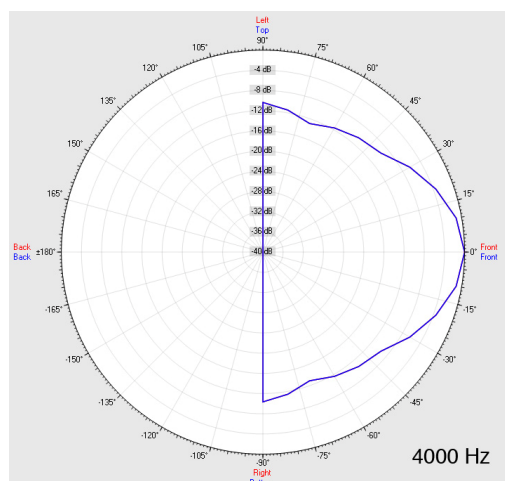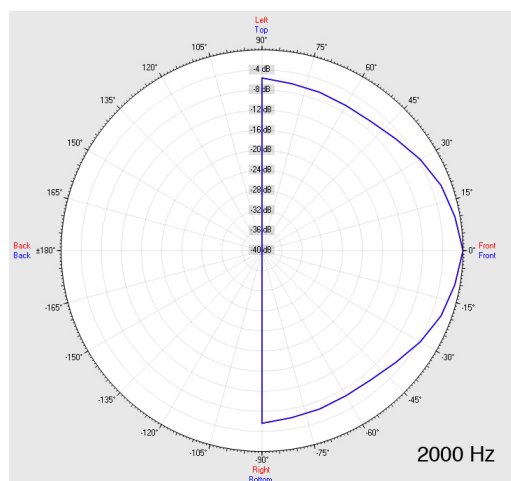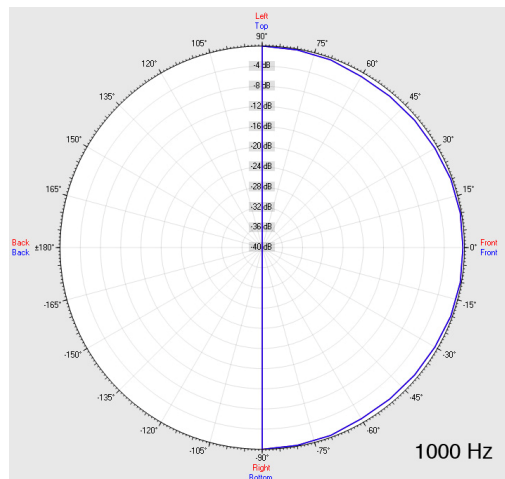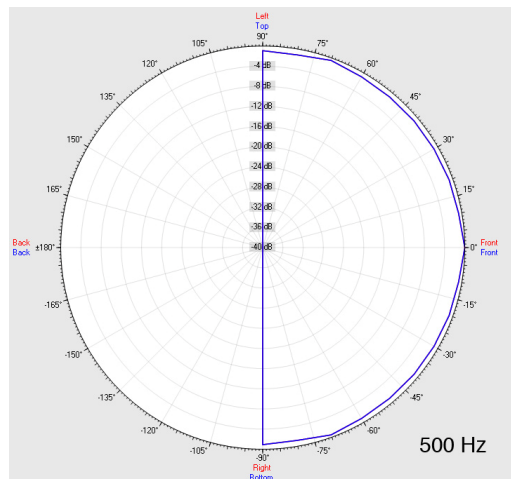

W
U
L

270
DC

EN
5424

I
N

W
A
L
L
L
O
U
D
S
P
E
A
K
E
R

FOR
A/B